HEAVY DUTY CONVEYOR

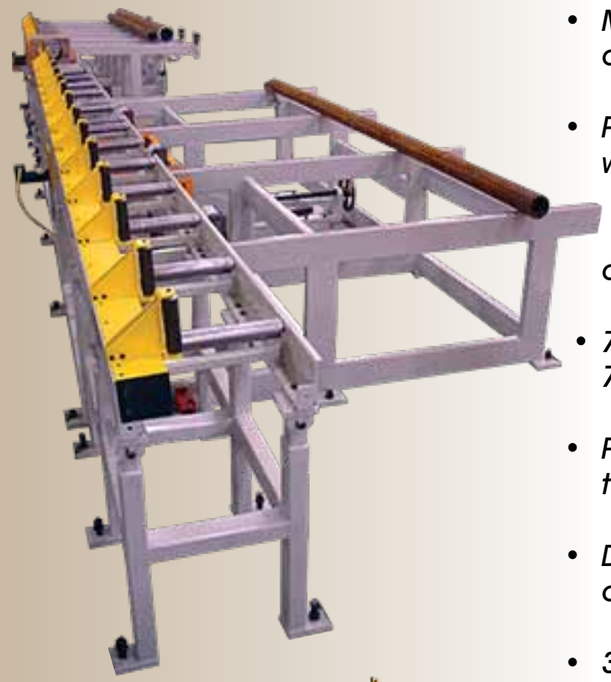

- *Multi-Arm Tubing rack storage frame with adjustable Gravity arms (load & unload)*
- *Pneumatic "one at a time" load escapement with 3000 pound tube load capacity*
- *Powered Conveyor roller bed (via slaved drive chains) with vertical back-up rollers*
- *76 mm (3 in) stainless steel rollers on 25 mm to 76 mm (1 in to 3 in) centers to suit scanner coil*
- *Pneumatic unload escapement with 3000 lb. tube load capacity*
- *DC Motor Controller with Hand Switch to turn conveyor bed on & off*
- *3-position hand valves for actuating load and unload escapement*
- *Excellent for Induction Heating Applications*

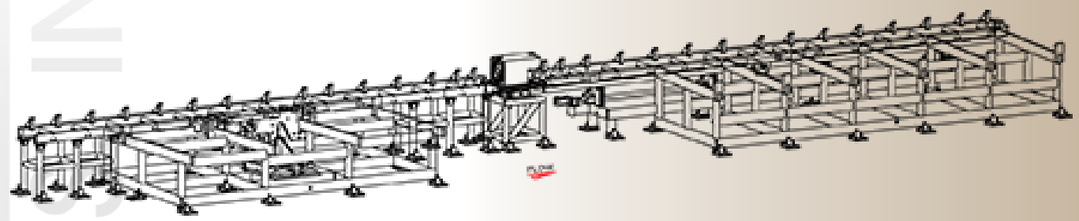

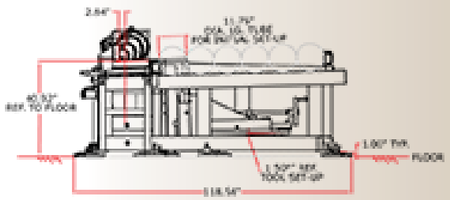

Specifications	*Solutions engineered to customer's requirements*
Load Capacity	1360 kg (3000 lb.)
Tubing Back Pressure Maximum	6803 kg (15000 lb.)
Gear Motor Drive	110 VDC (No Motor Starter Required)
Conveyor Speed	0 to 20 ft. per minute
Roller Heat Capacity	900°F (482°C)
Unload Capacity	1360 kg (3000 lb.)

HEAVY DUTY CONVEYOR

EASOM
AUTOMATION SYSTEMS, INC.
EXCELLENCE IN AUTOMATION SYSTEMS

32471 INDUSTRIAL DRIVE
MADISON HEIGHTS, MI 48071
248.307.0650

WWW.EASOMENG.COM